

**MULTRON** Handheld Programmer is designed to read and program the sensitivity and device type of addressable detectors and modules. The programmer can also read the no. of LED and user code of each LED on Repeater Panels.

**Features :-**


- ❖ **Compact & Portable.**
- ❖ **Programming tool for addressing and testing of addressable devices**
- ❖ **Program all loop devices (address 1 to 242)**
- ❖ **Able to program devices with I<sup>2</sup>C interface such as MMC-8903 Mimic PCB Card and DET-105RB Beam Detector..etc..**
- ❖ **Re-program facility enable adjustment of alarm threshold of detectors**
- ❖ **Able to switch 'ON' or 'OFF' for Rate-of-Rise function for ROR/FT Heat Detector (DET-A103)**
- ❖ **Program Input Modules to accept N/C or N/O contacts**
- ❖ **Quadruple digit alphanumeric LCD display**
- ❖ **Low consumption hibernation and auto shut off function**
- ❖ **Low battery indication**



*Portable & Ease in Operation..*

**Specification :-**

Power	: 9V Battery
Operating Current	: ≤ 8 mA
Standby Current	: ≤ 100 uA
Operating Temp.	: -10°C to +50°C
Relative Humidity	: 95%, non condensing
Dimension (LxWxH)	: 64mm x 24mm x 164mm
Weight	: 200 gram

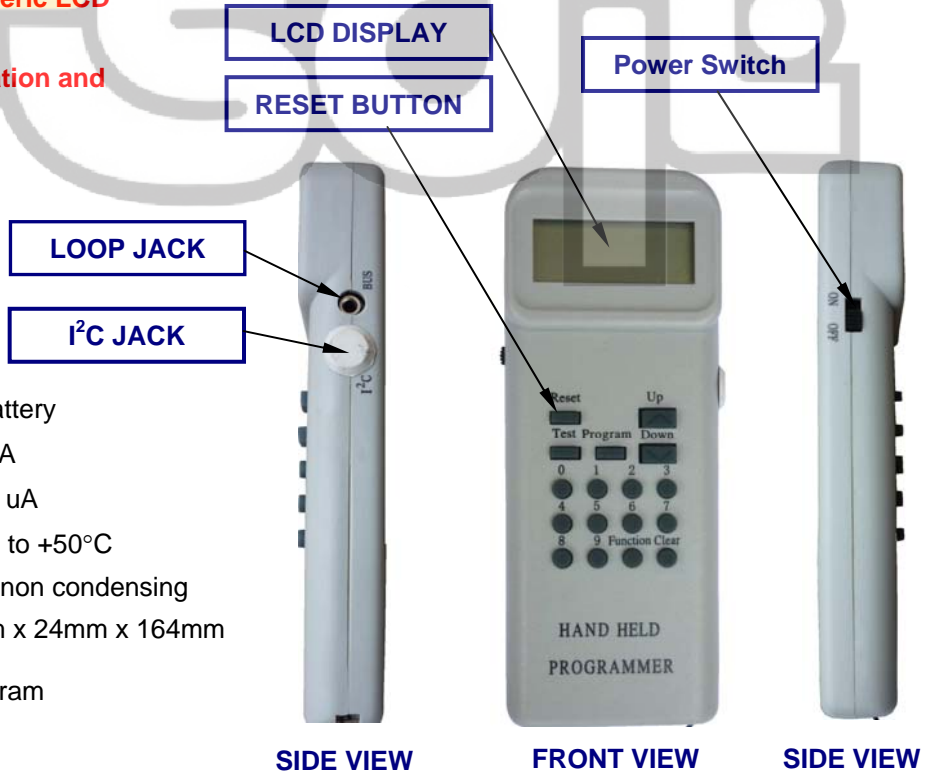

*Due to constant improvement in our products, we reserved the right to modify or withdraw any product or service without prior notice.*

Distributed By :-

